


CARACTÉRISTIQUES TECHNIQUES




TYPE	PTC ¹ kg	CU ² kg	dimensions utiles				dimensions hors tout		hauteur d'attelage ³		rampes				roues simples
			L mm	l mm	H mm	h mm	Lht mm	lht mm	mini mm	maxi mm	long. mm	larg. mm	écart ¹ min. mm	pente G %	
PE 6000	6000	4240	4100	2020	640	300	5860	2550	640	850	2000	300	580	18	215/75R17,5
PE 8000	8000	6100	4100	2020	640	300	5860	2550	640	850	2000	300	580	18	215/75R17,5
PE 80 RD	8880	6480	4600	2400	840	-	6670	2400	640	970	2000	300	460	16	215/75R17,5

¹ Poids total en charge ² Charge utile




Gamme PE

Porte-engins surbaissés
avec roues hors plateau

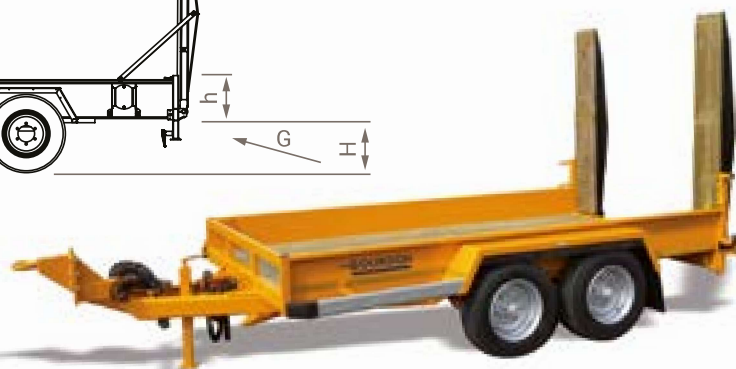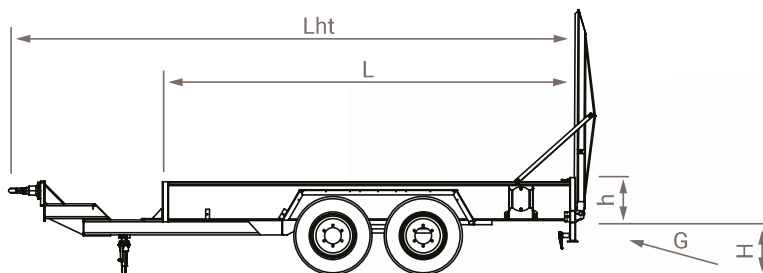

Gamme PE RD

Porte-engins à pan coupé
avec roues sous plateau

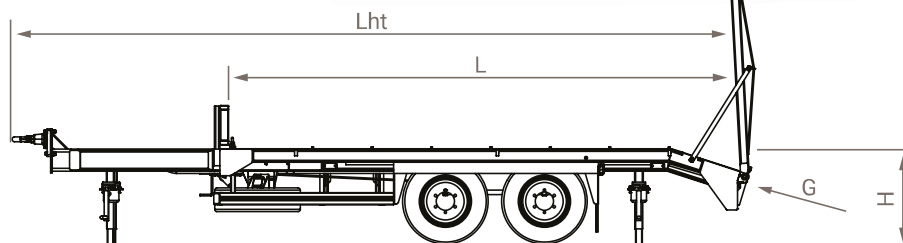

- RAMPES**
- 1 assistées par ressorts : aide à la remontée + frein de chute
 - 2 réglables en écartement

TIMON Sur platine, réglable en hauteur.

PE 80 RD Pan coupé
Béquille de stabilisation

