


When you own a Doosan forklift, our high quality, responsive customer support team comes with it. The Doosan network starts with your local dealer and includes a national team of highly qualified and experienced personnel, ready to support all your material handling needs. Doosan also provides 100% parts inventory to ensure downtime is minimized and is on hand to offer technical advice and support via our local, regional and national partners.

The Doosan network starts with your local dealer and ends with a national team of highly qualified and experienced personnel standing ready to support all your material handling needs.

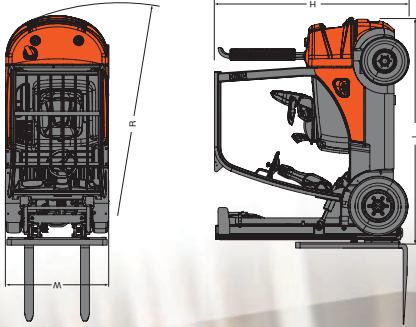

Option Availability

Options	D15/D85-14/D205C-5	G15/D85-14/G205C-5	D107/D50/D85-14/D106C-3	G207/D50/D85-14/G205C-5	● : Standard ○ : Optional
Drive in Back Overhead Guard	○	○	○	○	○
Oil-Cooled Disc Brakes	○	○	●	●	●
Fuel Cap with Key	○	○	○	○	○
Precleaner	○	○	○	○	○
Vertical Exhaust Tube	○	○	●	○	○
Catalytic Muffler *	○	○	○	○	○
Modular Operator Cabin	○	○	○	○	○
Radiator Screen	○	○	○	○	○
Non Marking Tire(Solid)	○	○	○	○	○
Spark Arrestor(w/o Cabin)	○	n/a	○	n/a	n/a
Mono Pad Foot Direction and Acceleration Control	○	○	○	○	○
Finger Control System	○	○	○	○	○
AutoShift (Single/Dual Tire)	○	○	○	○	○
Engine Shutdown	n/a	○	○	○	●
Swingout LP MTG	n/a	○	n/a	○	○
Swingdown LP MTG	n/a	○	○	n/a	○
Lift and Tilt locking Hydraulic Control Valve	●	○	●	○	●
Auto Tilt Leveling	○	○	○	○	○
Rear Grab Bar with Horn	○	○	○	○	○
Quad Mast	n/a	n/a	○	○	○
Hydraulic Accumulator	○	○	○	○	○
Integral Sideshifter	○	○	○	○	○
Integral Shifting Fork Positioner	○	○	○	○	○
Hook on Sideshifter	○	○	○	○	○
UL LPS DS Rating	○	n/a	○	○	○

* Catalytic muffler is standard for Tier-3 E6 only

Main Specification

	Sales Model	D15S-5	D18S-5	D205C-5	G15S-5	G18S-5	G205C-5
Rated Load Capacity	kg	1500	1750	2000	1500	1750	2000
Load Center	mm	500	500	500	500	500	500
Overall Length to Fork Face	L mm	2170	2215	2250	2170	2215	2250
Truck Overall Width	W mm	1070	1070	1070	1070	1070	1070
Height of Overhead Guard	H mm	2170	2170	2170	2170	2170	2170
Minimum Turning Radius	R mm	1977	2022	2050	1977	2022	2050
Travel Speed, Loaded	km/h	19	19	19	18	18	18
Lifting Speed, Loaded	mm/s	600	600	600	600	600	600
Engine Models		V2403					
Rated Power of Engine	kW (HP) / rpm	34.2(45.8)/2400					
Max Torque	N-m / rpm	155.9/1600					
Displacements	cc	2434					

	Sales Model	D20S-5	D25S-5	D30S-5	D35C-5	G20E-5	G25E-5
Rated Load Capacity	kg	2000	2500	3000	3250	3500	2500
Load Center	mm	500	500	500	500	500	500
Overall Length to Fork Face	L mm	2530	2595	2700	2730	2765	2595
Truck Overall Width	W mm	1170	1170	1197	1197	1255	1170
Height of Overhead Guard	H mm	2183	2183	2183	2183	2183	2183
Minimum Turning Radius	R mm	2220	2265	2365	2395	2420	2265
Travel Speed, Loaded	km/h	19	19	18.5	18	18.5	19
Lifting Speed, Loaded	mm/s	530	520	500	490	420	510
Engine Models		AT10E98					
Rated Power of Engine	kW (HP) / rpm	43.7(59)/2300					
Max Torque	N-m / rpm	181/1600					
Displacements	cc	3319					

	Sales Model	G30E-5	G20P-5	G25P-5	G30P-5	G35C-5	G35C-5
Rated Load Capacity	kg	3000	2000	2500	3000	3250	3500
Load Center	mm	500	500	500	500	500	500
Overall Length to Fork Face	L mm	2700	2530	2595	2700	2730	2765
Truck Overall Width	W mm	1197	1170	1170	1197	1197	1255
Height of Overhead Guard	H mm	2183	2183	2183	2183	2183	2183
Minimum Turning Radius	R mm	2365	2220	2365	2365	2395	2420
Travel Speed, Loaded	km/h	18	19	19	18	18	18.5
Lifting Speed, Loaded	mm/s	500	530	510	500	500	420
Engine Models		G424(E)(LP, DF)					
Rated Power of Engine	kW (HP) / rpm	48.7(65.3)/2600					
Max Torque	N-m / rpm	186/1900					
Displacements	cc	2359					

